








| W-1 | W-2 | W-3 | W-4 | W-5 | W-6 |
|-------------------|------------------|-------------------|-------------------|------------------|----------------|
| $\gamma = 25.77g$ | $\gamma = 6.76g$ | $\gamma = 18.72g$ | $\gamma = 21.57g$ | $\gamma = 4.12g$ | $\gamma = 2.7$ |
| $R = 50$ | $R = 100$ | $R = 100$ | $R = 100$ | $R = 500$ | $R = 500$ |
| $T = 10.26$ | $T = 5.32$ | $T = 14.81$ | $T = 17.11$ | $T = 16.18$ | $T = 10.1$ |
| $B = 1.04$ | $B = 0.14$ | $B = 1.09$ | $B = 1.45$ | $B = 0.26$ | $B = 0.1$ |
| $K = 20.24$ | $K = 10.62$ | $K = 29.41$ | $K = 33.89$ | $K = 32.35$ | $K = 21.1$ |

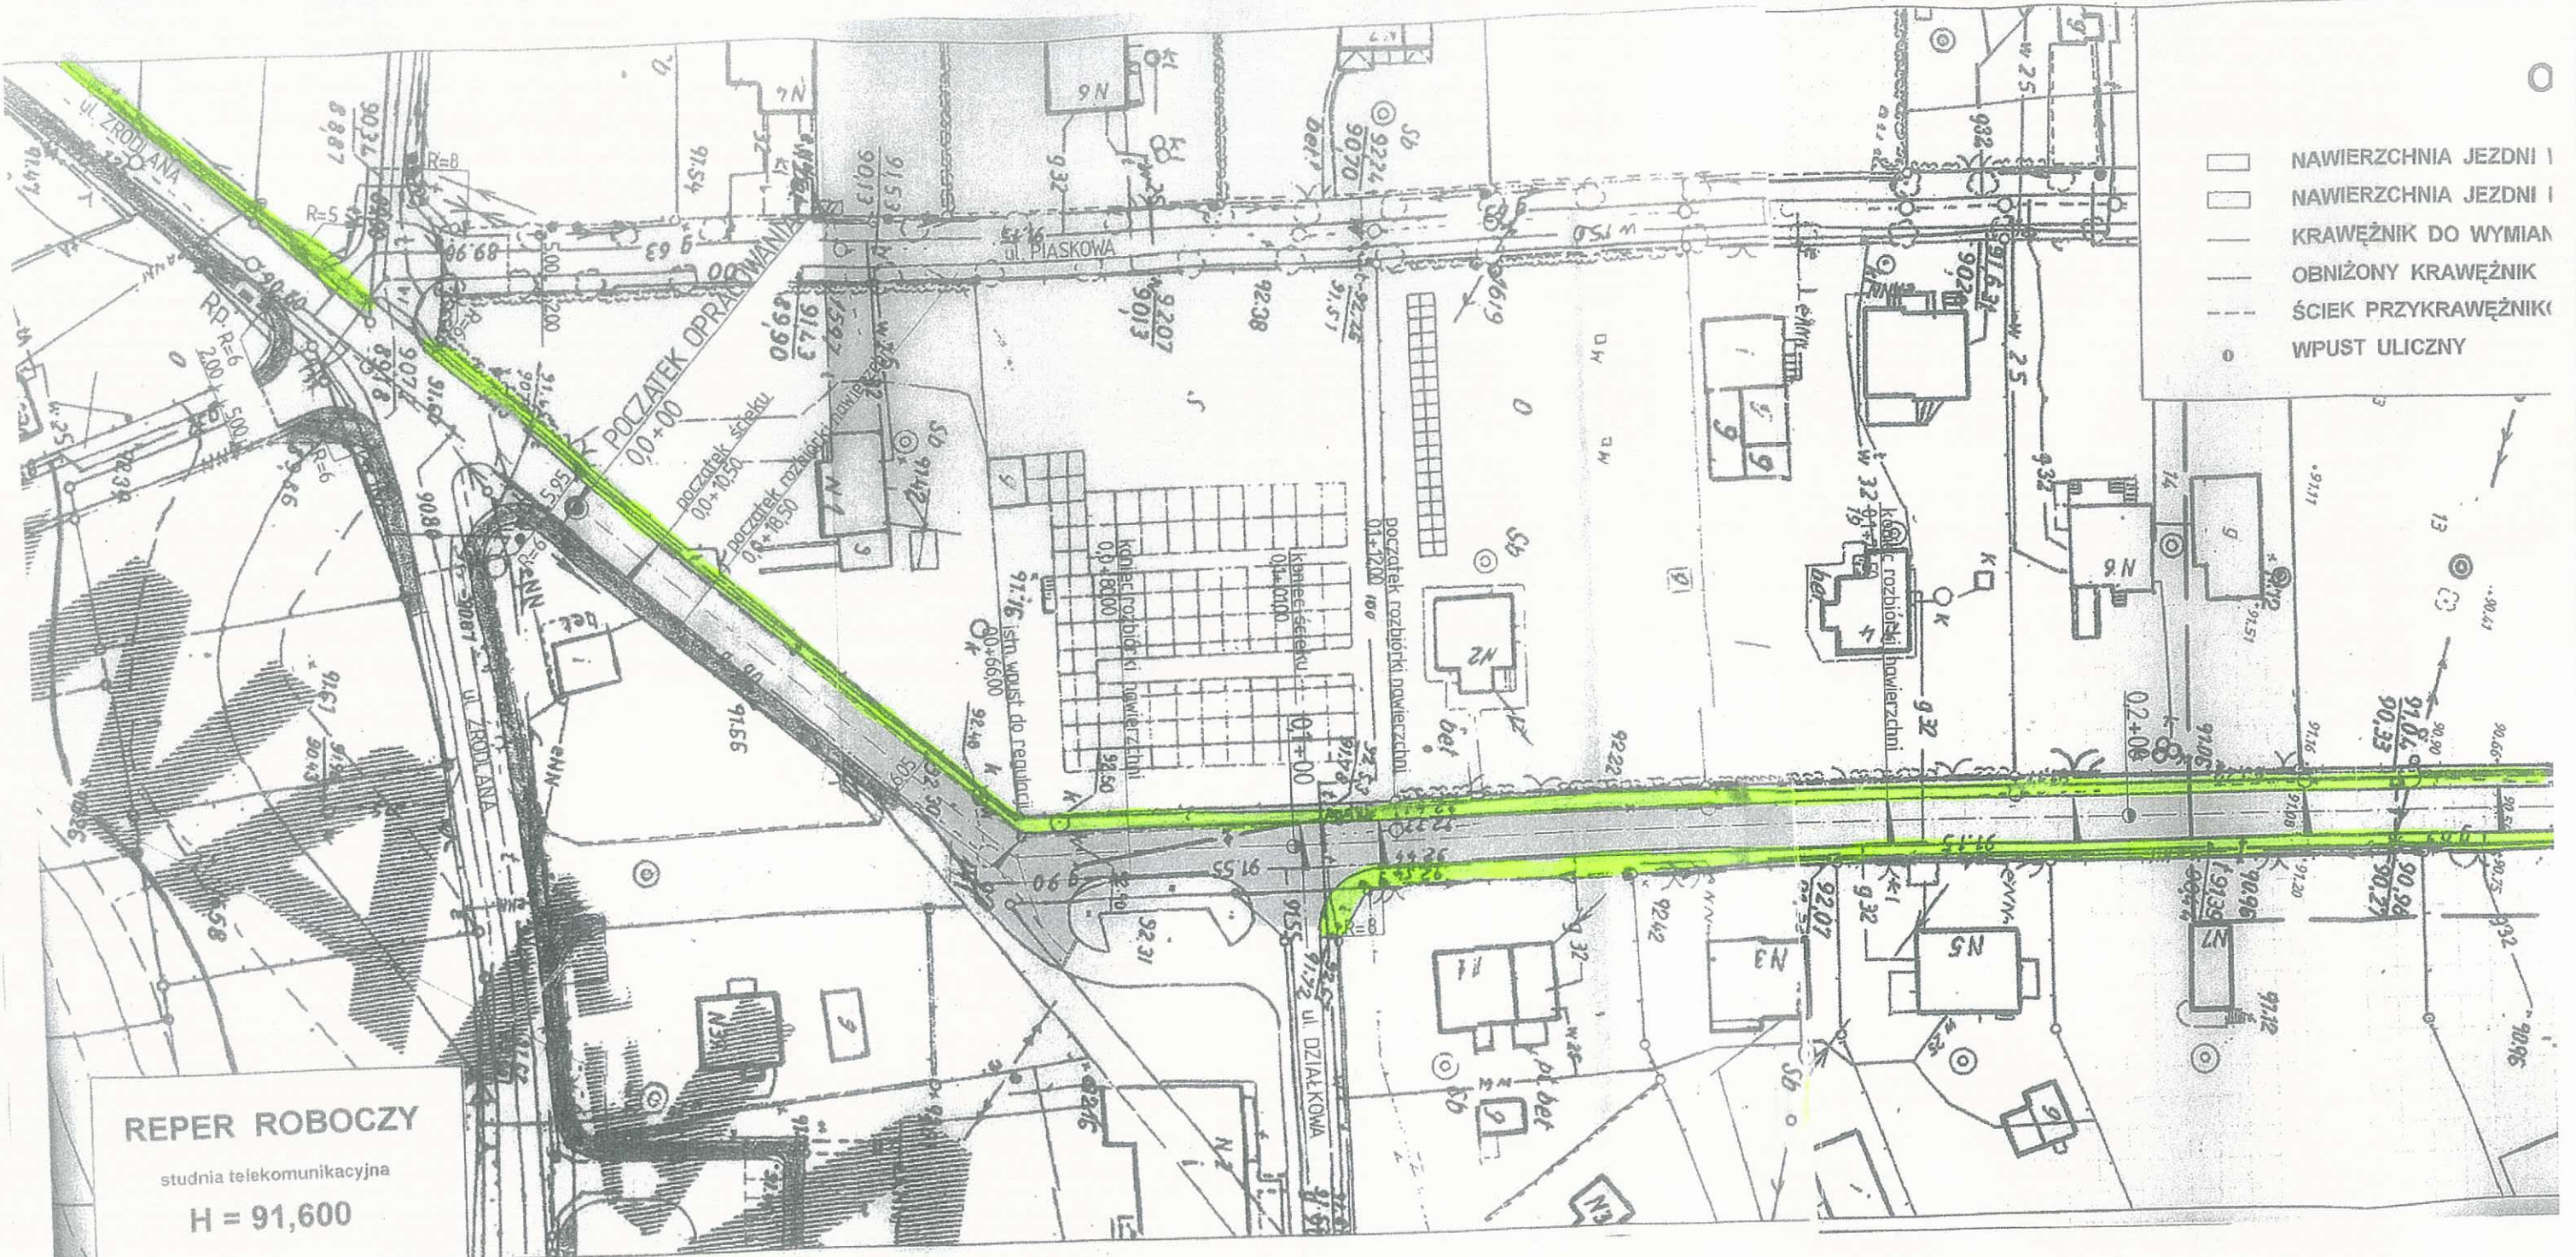

OBJAŚNIENIA

| | | |
|--|------------------------------------|--|
| | NAWIERZCHNIA JEZDNI | BETON ASFALTOWY |
| | NAWIERZCHNIA CHODNIKA | BETONOWA KOSTKA BRUKOWA SZARA GR. 6 CM |
| | KRAWĘŻNIK ULICZNY | BETONOWY WIBROPRASOWANY 15x30 CM |
| | KRAWĘŻNIK ULICZNY OBNIŻONY | BETONOWY WIBROPRASOWANY 15x30 CM |
| | PROJEKTOWANE LINIE ROZGRANICZAJĄCE | |



-  NAWIERZCHNIA JEZDNI I
-  NAWIERZCHNIA JEZDNI I
-  KRAWĘŻNIK DO WYMIAN
-  OBNIŻONY KRAWĘŻNIK
-  ŚCIEK PRZYKRAWĘŻNIKI
-  WPUST ULICZNY